
|            |         | · · · · · · · · · · · · · · · · · · · |  |
|------------|---------|---------------------------------------|--|
| Parts List |         |                                       |  |
| ITEM       | QTY     | PART NUMBER                           | DESCRIPTION  |
| 1          | 4       | MS20004-6                             | INTERNAL WRENCH CAP SCREW                                  |
| 2          | (1) REF | DT-1 (SHOWN - NOT INCLUDED)           | DOVE TAIL ASSY   |
| 3          | 8       | MS20004-6                             | INTERNAL WRENCH CAP SCREW                                  |
| 4          | 1       | AFM-DTFLR-1                           | ADPATER DT TO 5.5 STD PTRN                                 |
| 5          | (1) REF | SENSOR AS REQUIRED                    | FLIR STAR SAFIRE III OR EQVL SENSOR (SHOWN - NOT INCLUDED) |

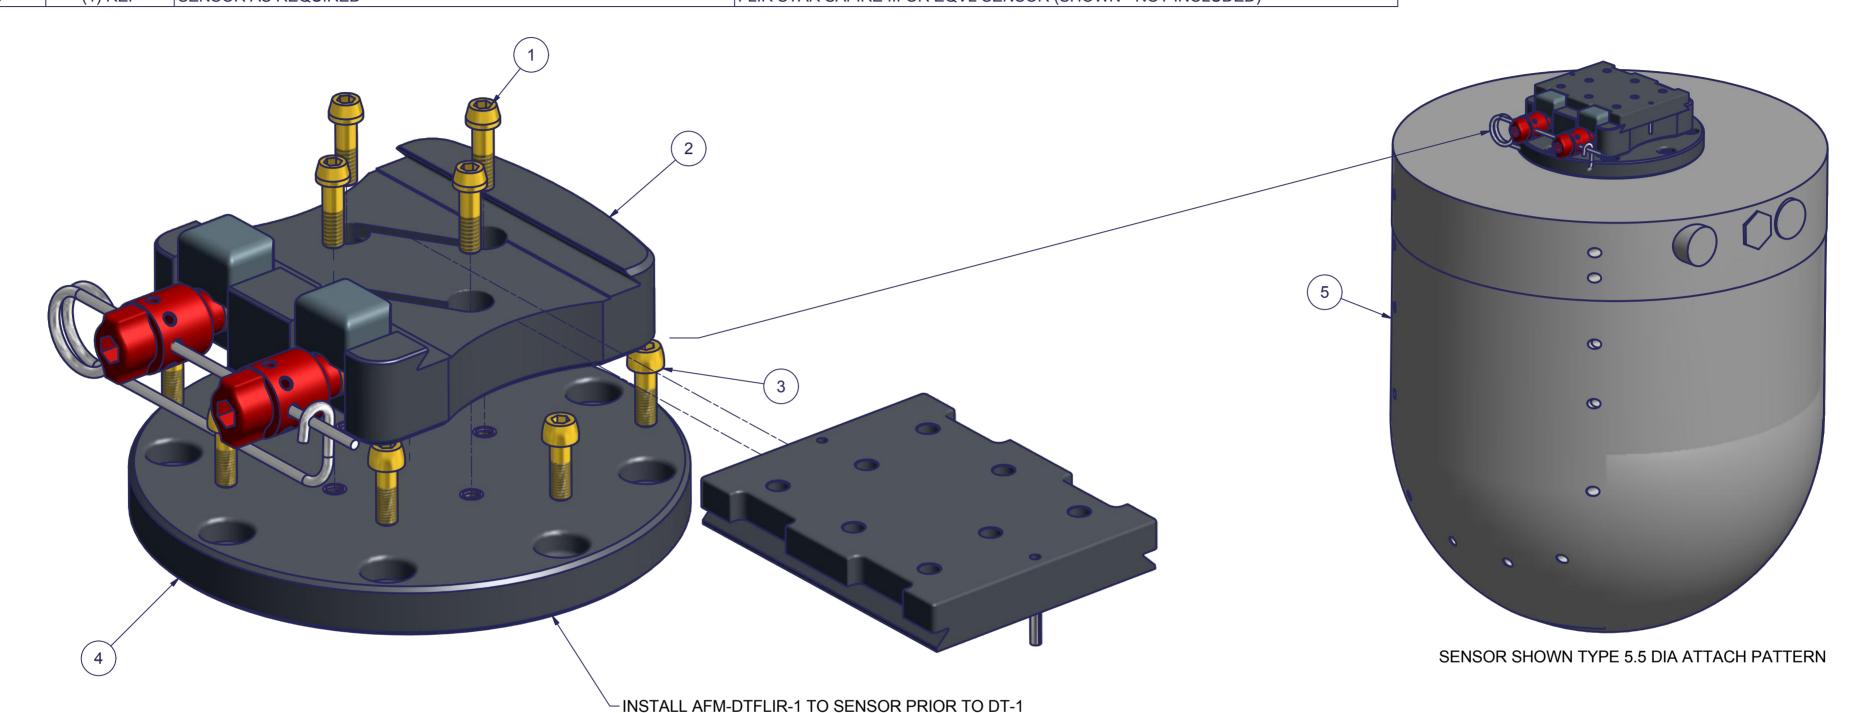

## **AFM-DTFLR-1 ASSY**

## **GENERAL NOTES:**

- 1. INSTALL AND TORQUE ALL HARDWARE PER AC 43.13-1B SECTION 3,4,5 UNLESS OTHERWISE NOTED
- 2. GRIP LENGTH IS TO BE DETERMINED AT INSTALLATION. NO THREADS ARE TO BE IN BEARING AND A MINIMUM OF TWO THREADS OR A MAXIMUM OF FOUR THREADS MUST BE SHOWING AFTER REACHING PROPER TORQUE ON FASTENERS. GRIP LENGTH GIVEN EITHER IN LIST OF MATERIALS OR CALLED OUT ON DRAWINGS ARE FOR REFERENCE ONLY
- 3. REFER TO SENSOR INSTALLATION LIMITATIONS AND REQUIREMENTS FOR HARDWARE TYPE, LENGHT AND TORQUE.
- 4. REFER TO DT-1 INSTALLATION INSTRUCTIONS FOR DT-1 ATTACHMENT AND LIMITATIONS

**REVISION HISTORY** DESCRIPTION ORIGINAL ISSUE DATE **REV** N/C 11/10/2010 **DRAWING** Airfilm Camera Systems, LLC UNLESS OTHERWISE NOTED ALL DIMENSIONS ARE INCH TOLERANCES DRAWN 11/10/2010 Georgetown, Ca DT TO 5.5 DIA ADAPTER ASSY, CHECKED TITLE **DECIMALS** .X +/- 0.1 .XX +/- 0.03 .XXX +/- 0.005 **INSTALLATION APPROVED** DWG NO REV SIZE ANGULAR +/- 0.5 DEG PROPRIETARY NOTICE N/C **AFM-DTFLR-1 INSTALL** SCALE N/A DO NOT SCALE DWG SHEET 1 OF 1

3 4 2